

## Höegh Icons



**a**



**c**



**f**



**k**




**l**

### 2 lashings each end when stowed athwartship

It must be ensured that the tires of the cars are located on the fixed floor of the ship during transport by sea, i.e. the tires must not be located on rings, chains etc. or have pressure contact or lateral contact with rings, chain etc.

## Lashing Instructions

Bumper to bumper:	50 cm
Side to side between mirrors:	15 cm
Side to obstruction:	50 cm
Bumper to bulkhead:	50 cm
Walkway:	100 cm
Distance to emergency exit / ladders:	100 cm
Keys placed on windscreen wiper switch	
Battery main-switch:	Placed in trunk

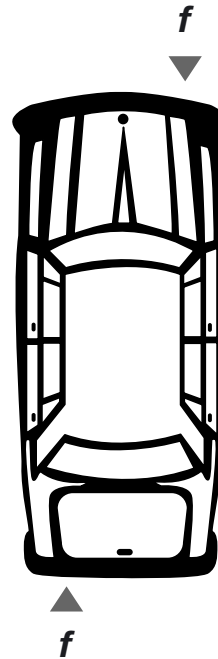

● a+c



Only to be used when non Höegh Ro-Ro Car lashing are available.

● a+c

