

Höegh Icons



a



b



e



f



h




k



l

Front wheel lashing
No athwartships stowage

It must be ensured that the tires of the cars are located on the fixed floor of the ship during transport by sea, i.e. the tires must not be located on rings, chains etc. or have pressure contact or lateral contact with rings, chain etc.

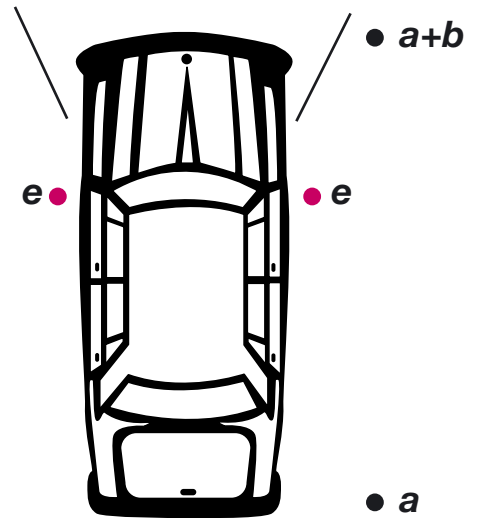

Lashing Instructions

Bumper to bumper:	50 cm
Distance between side mirror (turned out):	10 cm
Side to obstruction:	50 cm
Side to side:	30 cm
Distance to emergency exit/ladders:	50 cm
Walkway:	100 cm

