

## Höegh Icons



**a**



**b**



**e**



**f**



**h**




**k**



**l**

### *No athwartships stowage*

It must be ensured that the tires of the cars are located on the fixed floor of the ship during transport by sea, i.e. the tires must not be located on rings, chains etc. or have pressure contact or lateral contact with rings, chain etc.

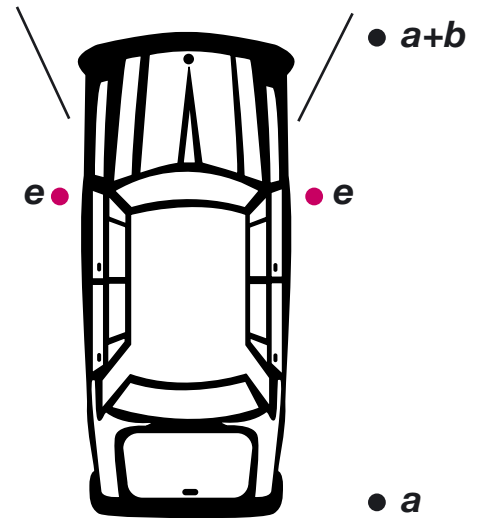

## Lashing Instructions

Bumper to bumper:	40 cm
Side to side:	10 cm
Side to obstruction:	10 cm
Walkway:	50 cm
Distance to emergency exit/ladders:	50 cm

