

## Höegh Icons



**a**



**f**



**k**



**l**

### No athwartships stowage

It must be ensured that the tires of the cars are located on the fixed floor of the ship during transport by sea, i.e. the tires must not be located on rings, chains etc. or have pressure contact or lateral contact with rings, chain etc.

## Lashing Instructions

Bumper to bumper: 40 cm

Distance between side mirror: 10 cm

Side to obstruction: 10 cm


Side to side: 30 cm

Distance to emergency exit/ladders: 50 cm

Walkway: 50 cm

Keys: Keys taken out, the kill switch will be turned off by the driver. Keys will be on a rubber string and placed around the steering rod.

Screw in lashing eye **f**

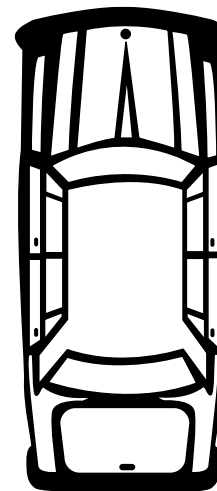

• **a**

• **a**

Screw in lashing eye **f**

