


Höegh Icons



It must be ensured that the tires of the cars are located on the fixed floor of the ship during transport by sea, i.e. the tires must not be located on rings, chains etc. or have pressure contact or lateral contact with rings, chain etc.

**Two lashings in front eye bolt.
Lashing in each slot hole just in front of rear tyres, beneath the car.**

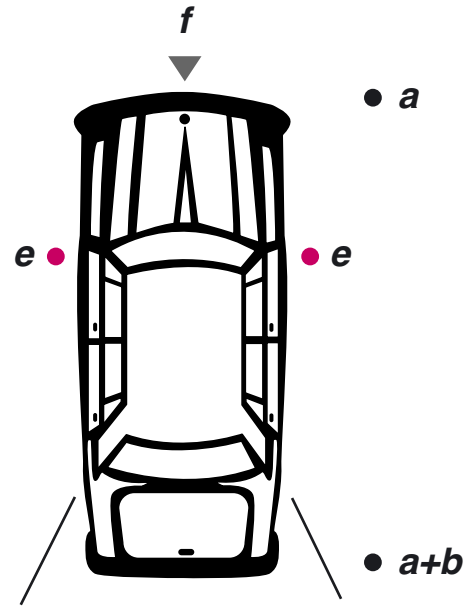

Lashing Instructions

Bumper to bumper:	50 cm
Side to side:	60 cm
Side to obstruction:	30 cm
Bumper to bulkhead:	50 cm
Vicinity of fire hydrant:	60 cm
Walkway:	60 cm
Driver's door to bumper:	60 cm
Vicinity of emergency exit and ladders:	60 cm
Vicinity of key vehicles:	60 cm

Keys to be placed in cup holder located near center console

