

Höegh Icons



a



b



e



g



h




k



l

It must be ensured that the tires of the cars are located on the fixed floor of the ship during transport by sea, i.e. the tires must not be located on rings, chains etc. or have pressure contact or lateral contact with rings, chain etc.

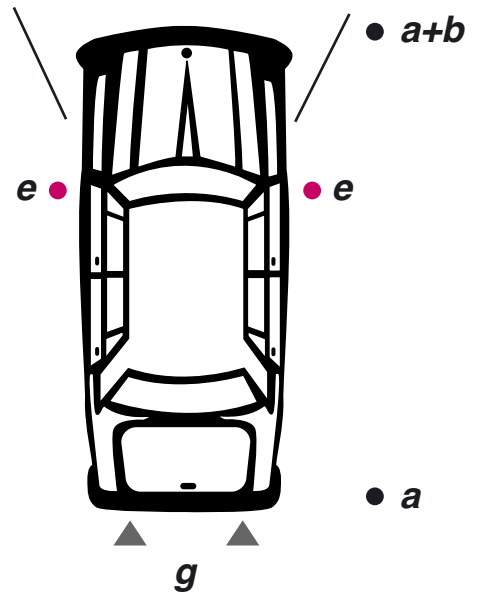

Lashing Instructions

Bumper to bumper:	50 cm minimum
Side to side (without mirror):	10 cm
Side to obstruction:	20 cm minimum
Walkway:	50 cm minimum
All windows to be closed	
Keys to be placed:	Front seat

