

Höegh Icons



a



b



e



g



h




k



l

It must be ensured that the tires of the cars are located on the fixed floor of the ship during transport by sea, i.e. the tires must not be located on rings, chains etc. or have pressure contact or lateral contact with rings, chain etc.

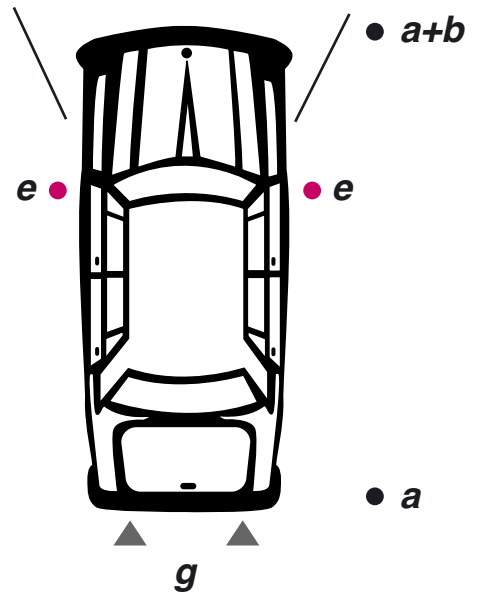

Lashing Instructions

Bumper to bumper: 50 cm minimum

Side to side (without mirror): 10 cm

Side to obstruction: 20 cm minimum

Walkway: 50 cm minimum

All windows to be closed

Keys to be placed: Front seat

