


## Höegh Icons



It must be ensured that the tires of the cars are located on the fixed floor of the ship during transport by sea, i.e. the tires must not be located on rings, chains etc. or have pressure contact or lateral contact with rings, chain etc.

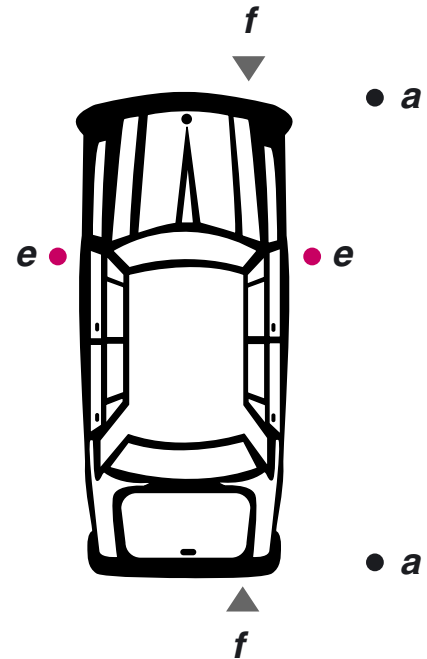

## Lashing Instructions

Bumper to bumper:	50 cm
Side to side (without mirror):	10 cm
Side to obstruction:	20 cm
Walkway:	50 cm
All windows to be closed	
Keys to be placed:	Front seat

When loading the Volvo S80-model onboard any Höegh vessel, you need a special hook to be able to lash it in the rear.

