

Parking Instruction

Parking location according to terminal operator

Units should be segregated by:


Discharge port.

Unit type – cars, SUV, vans, high-and-heavy.

Unit model – units with similar lengths should be parked together.

Right-hand and left-hand driven cars to be separated.

Static cargo separated from Wheeled/Running cargo

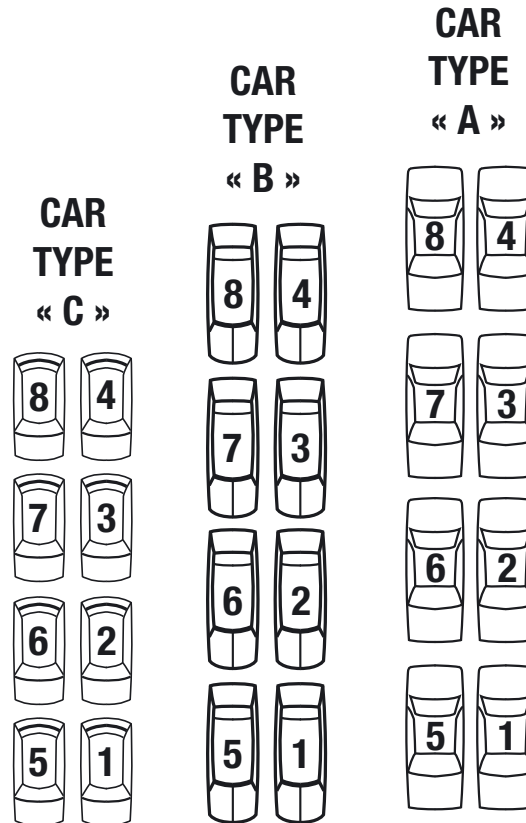

Parking Instruction

Windows

The Terminal to ensure all windows are closed and should also be prepared to assist with plastic type cover for windows that become disabled in open position.



Keys

Key string should be applied during receiving. All units, including high and heavy should have key string attached. Keys should be removed from ignition when engine is not running.



Parking Brake

Parking brake should be applied while units are stored on terminals.

Requirements from manufacturer always to supersede Höegh Autoliners Standard Instructions.